

# Metropol 1200



**180**  
**Mountain**  
**Hardwood**



**305**  
**Natural Hardwood**



**350**  
**Golden Oak**



**505**  
**Southern Oak**



**510**  
**Sand Oak**



**535**  
**Northern**  
**Weathered Gum**



**540**  
**Summer Blackbutt**



**559**  
**Southern**  
**Weathered Gum**



**570**  
**High Country**  
**Hardwood**



**710**  
**Coastal Hardwood**



**730**  
**Sun Bleached**  
**Hardwood**



**750**  
**Hidden Valley**

Specifications and colourations are subject to manufacturing tolerances. As part of the Godfrey Hirst continuous improvement program, Godfrey Hirst reserves the right to change the specifications of or delete colours of this product without notice. While all care is taken, product images may vary in colour due to possible printing process variations. Images do not seek to duplicate the exact visual appearance, but serve merely as a guide or point of reference.  
[godfreyhirst.com](http://godfreyhirst.com)

# Metropol 1200

A durable floor with exquisite design, Metropol 1200 is a technologically advanced hybrid range that ticks all the right boxes. Available in a wide range of natural timber hues, you can enhance any space with a strong, stable and beautiful flooring that's easy to install.

## Technical Data


<b>Type:</b>	Hybrid Flooring	<b>Finish:</b>	Matte
<b>Dimensions:</b>	1200mm x 182mm	<b>Surface:</b>	Embossed
<b>Total Product Thickness:</b>	6mm	<b>Top Layer:</b>	Decorative Film & Wear Layer
<b>Wear Layer:</b>	0.3mm	<b>Substrate Layer:</b>	Trigon® Core Technology (Limestone Composite)
<b>Units Per Box:</b>	10 boards	<b>Backing Layer:</b>	1.5mm Acoustic Backing
<b>m<sup>2</sup> per box:</b>	2.184	<b>Profile:</b>	Micro Bevel
<b>m<sup>2</sup> per pallet:</b>	120.12	<b>Coating System:</b>	PUR
<b>Colours:</b>	12	<b>Installation Method:</b>	Uniclic®

## Performance

<b>Dimensional Stability:</b>	(ISO 23999) Length: 0.0, Width: 0.05, Curling: 0.0	<b>Flammability:</b>	(EN ISO 9239) CRF 11.0kW/m <sup>2</sup>
<b>Abrasion Rating:</b>	(EN 660-2) Group P	<b>Smoke Value:</b>	(EN ISO 9239) 121% minutes
<b>Impact Sound Reduction:</b>	Please refer to Godfrey Hirst Acoustic Performance specification sheet	<b>Slip Resistance:</b>	(AS 4586) P3
<b>Light Fastness:</b>	(EN ISO 105-B02) ≥6	<b>Warranty:</b>	25 Year Hybrid Limited Residential Warranty*
<b>Light Reflectance Values:</b>	180 - 9.30   305 - 20.51   350 - 10.81   505 - 16.33   510 - 36.78   535 - 15.19   540 - 24.11   559 - 9.73   570 - 19.39   710 - 28.83   730 - 24.20   750 - 18.52		

## Sustainability

<b>Product Transparency:</b>	Global Green Tag, GreenRate Level A certified
<b>Accreditation:</b>	Manufactured under a quality and environmental system certified and complying with ISO 9001 and ISO 14001 by an accredited certification body.
<b>Indoor Air Quality:</b>	Green Building Council Compliant for VOC emission rate limits

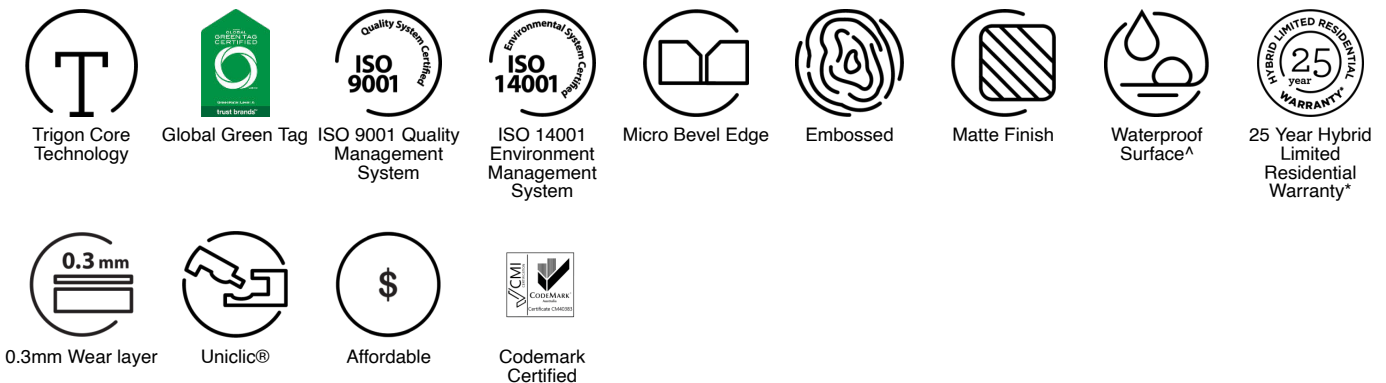

All Godfrey Hirst floors products must be installed in accordance with relevant Australian Standards and in conjunction with the Godfrey Hirst Hybrid Flooring Installation Instructions.  
 \*This product comes with a residential warranty for new product installed indoors in a residential home, if properly installed and maintained. This warranty is in addition to consumers' rights under the statutory consumer guarantee provisions in the Australian Consumer Law, which may exceed the rights under this warranty. The amount recoverable under the warranty decreases after five years. For full information in respect to the scope and limitations of this warranty, please refer to the full terms and conditions available from your retailer, by calling 1300 444 776, or by download from [www.godfreyhirst.com](http://www.godfreyhirst.com).  
 † Terms and conditions apply to all commercial warranties - contact your GH Commercial Account Manager.  
 ‡ Subject to proper installation, maintenance and local building code/regulatory approval.